



Sewerage series - Bend 45° -

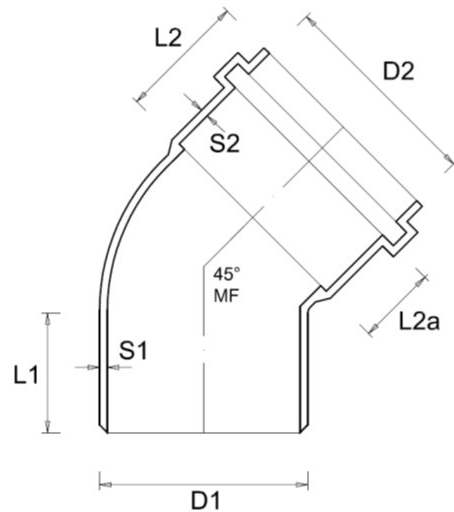

COA45160



REFERENCE REGULATIONS: EN 1401-1:2019

Item	D1 (M)	D2 (F)	L1 (M)	L2 (F)	L2 (A)	S1(M)	S2(F)	LENGT H mm	WIDTH mm	HEIG HT mm	WEIG HT g
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
COA45160	160,0	160,7	87	73	48	4,2	3,6	222	182	270	735
COA45200	200,0	200,8	104	86	58	5,0	4,4	275	327	222	1.388
COA45250	250,0	250,8	128	97	52	5,0	5,2	336	288	400	2.230
COA45315	315,0	316,0	138	120	68	7,8	6,9	415	352	470	4.640

Material: PVC-U

Colour: Red RAL 8023

Features: The 45° bends including O'RING gasket are used for:

- Discharges of civil and industrial waste water (white, black and mixed water).
- Industrial, agricultural and waste water discharges in general within the limit of the chemical resistance of the materials.

