



Completion range building fittings - bend 67° 30' -

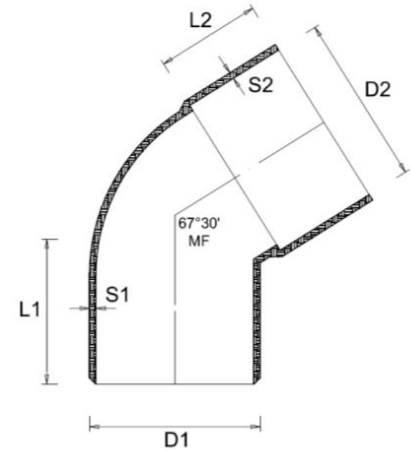

CS67100



REFERENCE REGULATIONS: UNI EN 1329-1:2021

| Item | D1 (M) mm | D2 (F) mm | L1 (M) mm | L2 (F) mm | S1 (M) mm | S2 (F) mm | Weight g | Length mm | Width mm | Height mm |
|----------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------|-------------|--------------|
| CS67040 | 40,0 | 40,4 | 35 | 27 | 3,1 | 2,4 | 49 | 85 | 47 | 89 |
| CS67050 | 50,0 | 50,4 | 42 | 32 | 3,0 | 2,5 | 72 | 105 | 57 | 108 |
| CS67063 | 62,0 | 63,4 | 46 | 43 | 3,1 | 3,1 | 118 | 133 | 70 | 129 |
| CS67080 | 80,0 | 80,5 | 49 | 41 | 3,2 | 3,1 | 164 | 146 | 87 | 147 |
| CS67082 | 82,0 | 82,5 | 50 | 44 | 3,2 | 3,0 | 172 | 153 | 89 | 150 |
| CS67100 | 100,0 | 100,5 | 59 | 53 | 3,3 | 3,1 | 262 | 183 | 107 | 181 |
| CS67125 | 125,0 | 125,7 | 87 | 62 | 3,2 | 2,5 | 427 | 235 | 132 | 238 |

Material: PVC-U

Colour: Orange RAL 2008

Features: The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard relating to low and high temperature drainages within the structure of buildings.

