



DATA SHEET

Basic range building fittings - bend 87° 30' -

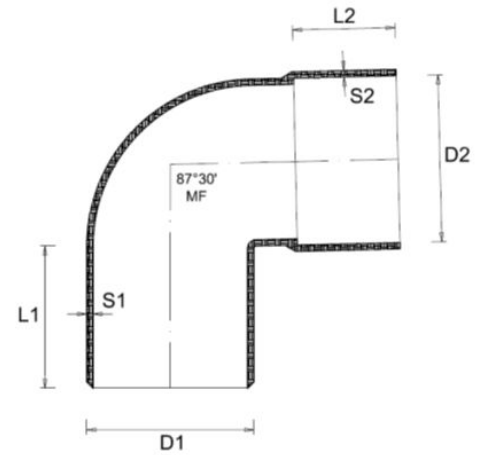

CS87100



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1 (M) mm	D2 (F) mm	L1 (M) mm	L2 (F) mm	S1 (M) mm	S2 (F) mm	Weight g	Length mm	Width mm	Height mm
CS87040	40,0	40,4	26	26	2,2	2,2	49	79	47	81
CS87050	50,0	50,4	33	33	2,4	2,1	82	98	56	101
CS87063	63,0	63,4	57	38	3,1	2,5	126	121	68	124
CS87080	80,0	80,5	58	47	2,3	2,3	188	153	86	154
CS87082	82,0	82,5	50	44	3,2	3,3	194	143	89	137
CS87100	100,0	100,5	57	52	2,9	2,8	284	170	107	169
CS87110	110,0	110,5	92	61	3,2	2,8	411	206	117	209
CS87125	125,0	125,7	65	56	3,2	3,3	436	200	133	199
CS87140	140,0	140,8	72	67	2,9	2,8	540	224	148	220
CS87160	160,0	160,8	70	55	3,2	3,0	628	236	166	234
CS87200	20,0	200,9	88	73	3,8	3,7	1.180	300	210	297

Material: PVC-U

Colour: Orange RAL 2008

Features: The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard relating to low and high temperature drainages within the structure of buildings.



FIRST PLAST S.r.l.
Località Isola Grande
17041 ALTARE (SV) - ITALIA
Tel. +39 019 58511
Email: export.first@firstcor.com



FIRST
CORPORATION