


Bend 45° MF for plumbing and drainage system **BI-BI KOLL**

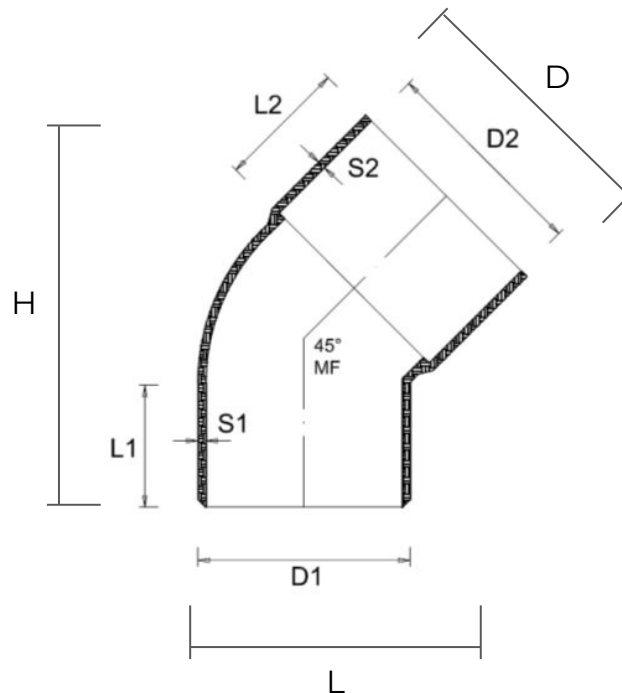


Item	D1 (M) mm	D2 (F) mm	L1 (M) mm	L2 (F) mm	S1 (M) mm	S2 (F) mm	L mm	D mm	H mm	Weight g	NF norm
CSG45032	32,0	32,4	24	23	2,1	2,0	55	38	72	24	E Me
CSG45040	40,0	40,4	27	27	2,9	2,1	66	46	85	41	E Me
CSG45050	50,0	50,4	32	32	2,2	2,1	82	56	104	56	E Me
CSG45063	63,0	63,4	46	38	2,9	2,1	122	68	125	88	Me
CSG45075	75,0	75,5	50	45	2,9	2,7	140	83	144	144	E Me

- Material:** PVC-U
Colour: Dark Grey RAL 7037
Features:

The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Bend 45° MF for plumbing and drainage system **BI-BI KOLL**

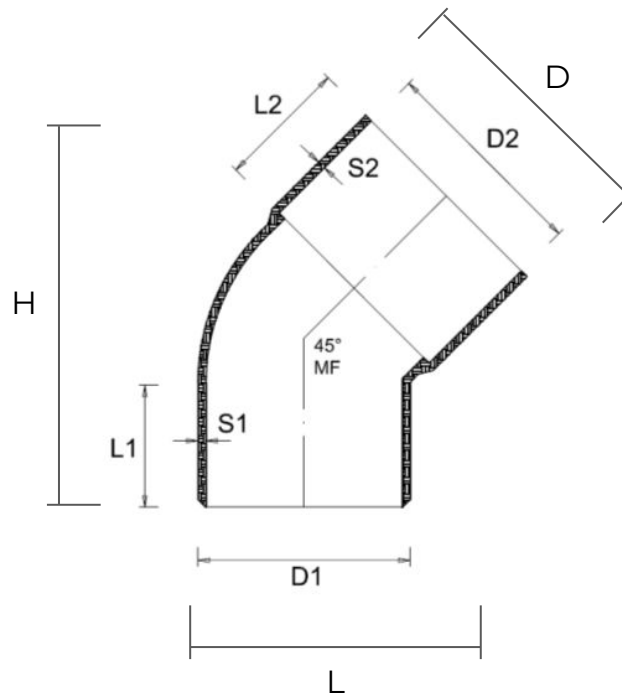

Item	D1 (M) mm	D2 (F) mm	L1 (M) mm	L2 (F) mm	S1 (M) mm	S2 (F) mm	L mm	D mm	H mm	Weight g	NF norm
CSG45080	80,0	80,5	48	43	3,2	3,2	125	87	150	158	Me
CSG45090	90,0	90,5	58	51	3,2	3,2	137	98	170	202	Me
CSG45100	100,0	100,5	68	56	3,0	2,8	150	106	191	234	Me
CSG45110	110,0	110,6	73	61	3,2	2,7	203	117	206	300	E Me
CSG45125	125,0	125,7	63	55	3,2	3,2	203	133	205	310	Me


Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Bend 45° MF for plumbing and drainage system **BI-BI KOLL**

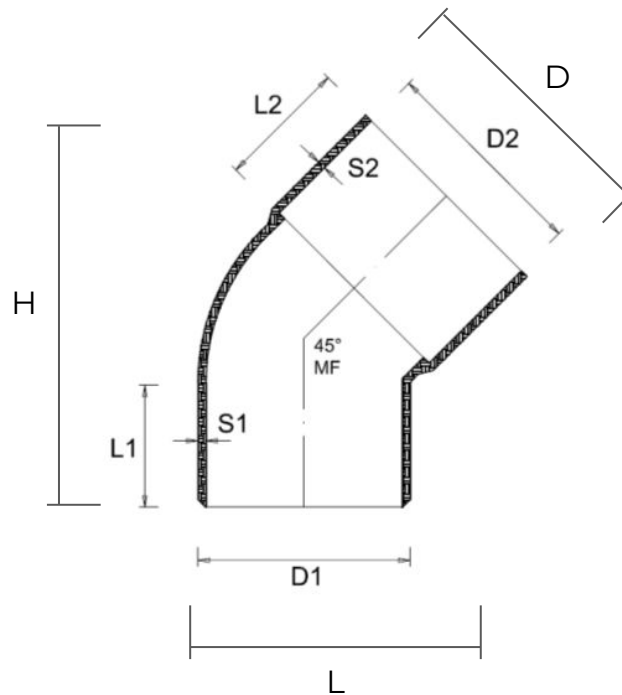

Item	D1 (M) mm	D2 (F) mm	L1 (M) mm	L2 (F) mm	S1 (M) mm	S2 (F) mm	L mm	D mm	H mm	Weight g	NF norm
CSG45140	140,0	140,8	69	65	2,7	2,9	227	148	228	382	Me
CSG45160	160,0	160,8	64	54	3,2	2,9	229	168	229	428	Me
CSG45200	200,0	200,8	84	74	3,9	3,8	292	210	294	856	Me
CSG45250	250,0	250,9	130	98	6,2	5,5	383	262	394	2120	Me
CSG45315	315,0	316,0	138	128	7,8	6,6	478	330	478	4334	Me

Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE.

