



Sewerage series - Bend 45° -

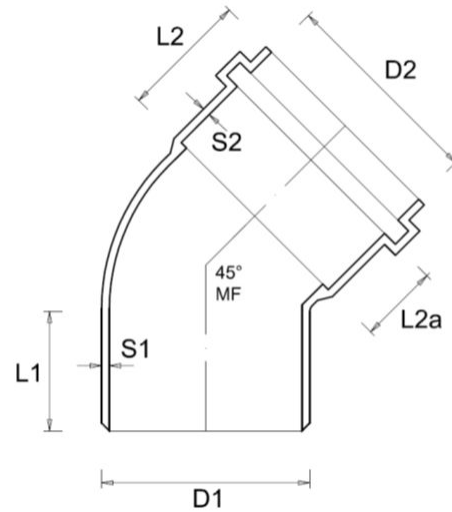

CSOG45160



REFERENCE REGULATIONS: EN 1401-1:2019

Item	D1 (M)	D2 (F)	L1 (M)	L2 (F)	L2 (A)	S1(M)	S2(F)	LENGTH mm	WIDTH mm	HEIGHT mm	WEIGHT g
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
CSOG45160	160,0	160,7	87	73	48	4,2	3,6	222	182	270	735
CSOG45200	200,0	200,8	104	86	58	5,0	4,4	275	327	222	1.388
CSOG45250	250,0	250,8	128	97	52	5,0	5,2	336	288	400	2.230
CSOG45315	315,0	316,0	138	120	68	7,8	6,9	415	352	470	4.640

Material: PVC-U

Colour: Grey RAL 7037

Features: The 45° bends including O'RING gasket are used for:
 - Discharges of civil and industrial waste water (white, black and mixed water).
 - Industrial, agricultural and waste water discharges in general within the limit of the chemical resistance of the materials.

