



Completion range building fittings - Bend 45° with inspection cap -

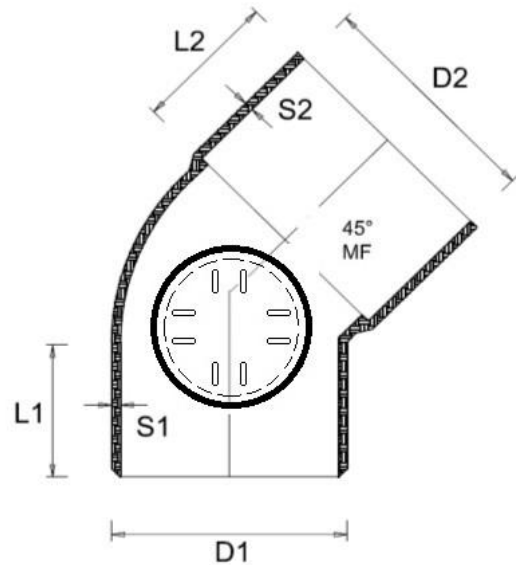

RIGHT

CSTVD45125



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	L1(M)	L2(F)	S1(M)	S2(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
CSTVD45100	100,0	100,5	49	47	3,0	2,6	148	153	185	270
CSTVD45125	125,0	125,6	61	55	3,2	3,0	181	188	224	410
CSTVD45160	160,0	160,6	62	53	3,2	2,8	223	221	257	470

Material: PVC-U

Colour: Orange RAL 2008

Features: The item is made from the 45° D.IXX mm MF branch to which a socket with threaded screw cap D. 80 mm is welded.
The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

