



Completion range building fittings - Bend 87° 30' with inspection cap -

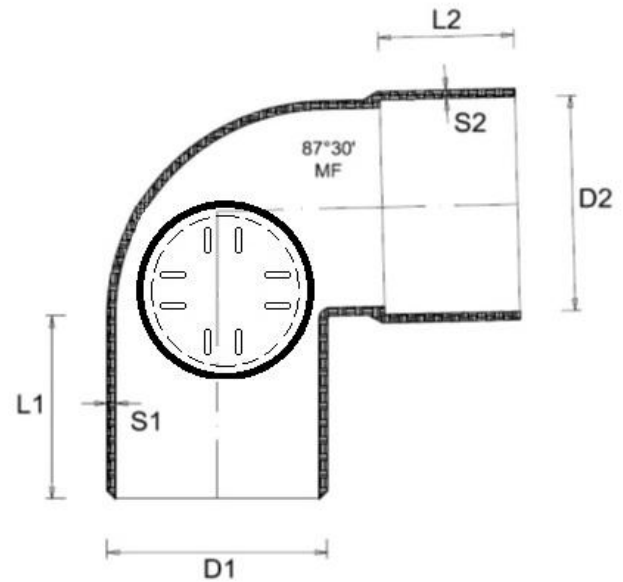

CSTVD87125



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	L1(M)	L2(F)	S1(M)	S2(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
CSTVD87100	100,0	100,5	57	52	3,0	2,6	170	170	169	390
CSTVD87125	125,0	125,6	65	56	3,2	3,0	200	195	199	540
CSTVD87160	160,0	160,6	70	55	3,2	3,0	236	230	234	735

Material: PVC-U

Colour: Orange RAL 2008

Features: The item is made from the 87°30' D.IXX mm MF branch to which a socket with threaded screw cap D. 80 mm is welded.
The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

