



## Completion range building fittings - Bend 45° with inspection cap -

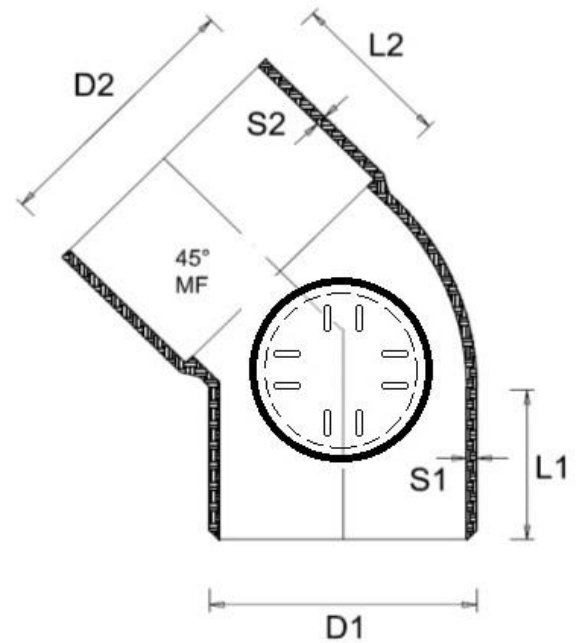

LEFT

CSTVS45125



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	L1(M)	L2(F)	S1(M)	S2(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
<b>CSTVS45100</b>	100,0	100,5	49	47	3,0	2,6	148	153	185	270
<b>CSTVS45125</b>	125,0	125,6	61	55	3,2	3,0	181	188	224	410
<b>CSTVS45160</b>	160,0	160,6	62	53	3,2	2,8	223	221	257	470

**Material:** PVC-U

**Colour:** Orange RAL 2008

**Features:** The item is made from the 45° D.IXX mm MF branch to which a socket with threaded screw cap D. 80 mm is welded.  
The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

