


Basic range building fittings - reduced branch 45° -



DRS10080

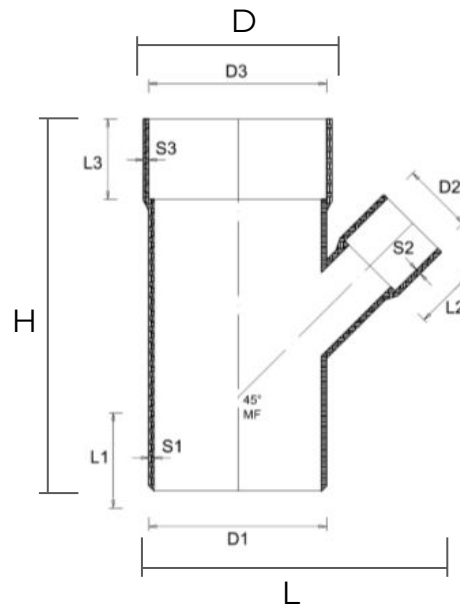

REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1 (M) mm	D2 (F) mm	D3 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	L mm	D mm	H mm	Weight g
DRS10040	100,0	40,4	100,5	12	26	58	3,0	2,0	2,9	145	107	238	252
DRS10050	100,0	50,4	100,5	78	32	57	3,0	2,3	2,4	150	107	211	286
DRS10063	100,0	63,4	100,5	66	38	57	3,0	2,8	2,7	194	107	244	364
DRS10080	100,0	80,5	100,5	54	56	47	3,0	2,8	2,7	206	107	244	382
DRS12540	125,0	40,4	125,6	58	38	63	3,1	2,5	3,1	204	132	274	480
DRS12550	125,0	50,4	125,6	62	42	63	3,1	2,8	3,1	214	132	274	490
DRS12563	125,0	63,5	125,6	62	44	63	3,1	2,8	3,1	219	132	274	505
DRS125100	125,0	100,5	125,6	62	52	63	3,1	2,9	3,1	239	132	274	560

Material: PVC-U

Colour: Orange RAL 2008

Features: The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard relating to low and high temperature drainages within the structure of buildings.

