
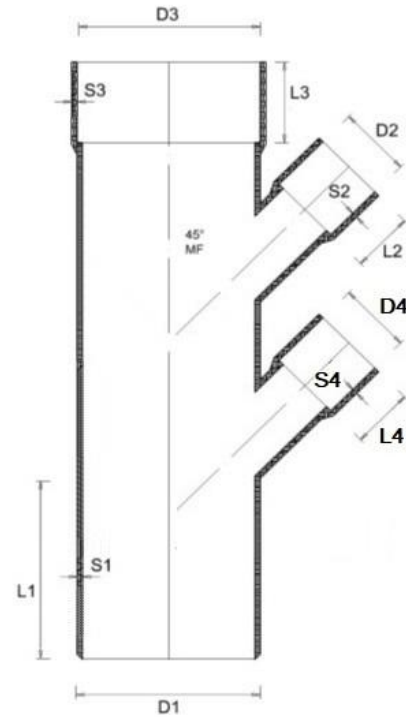


## Completion range building fittings - Double reduced branch 45° -



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	D3(F)	D4(F)	L1(M)	L2(F)	L3(F)	L4(F)	S1(M)	S2(F)	S3(F)	L4(F)	LENGT H	WIDTH	HEIG HT	WEIGH T
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
<b>DRS10D44</b>	100,0	40,4	100,5	40,4	85	26	57	26	3,0	2,0	3,0	2,0	157	106	320	500

**Material:** PVC-U

**Colour:** Orange RAL 2008

**Features:** The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

