



Basic range building fittings - branch 45° -

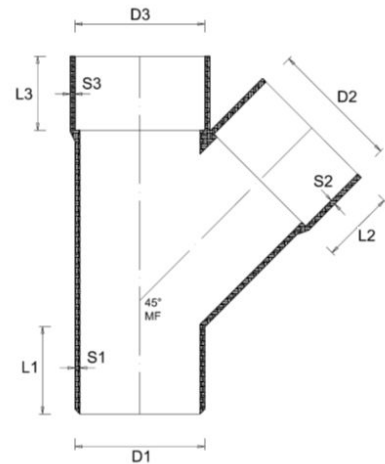

DS45100



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1 (M) mm	D2 (F) mm	D3 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	Weight g	Length mm	Width mm	Height mm
DS45040	40,0	40,4	40,4	28	28	27	2,1	2,1	2,2	78	94	47	120
DS45050	50,0	50,4	50,4	33	33	33	2,3	2,3	2,3	123	115	57	146
DS45063	63,0	63,4	63,4	45	45	38	3,1	2,3	2,2	180	140	68	176
DS45080	80,0	80,5	80,5	52	52	47	3,3	3,2	3,4	336	179	87	220
DS45082	82,0	82,5	82,5	49	49	44	3,2	3,2	3,2	336	184	89	221
DS45100	100,0	100,5	100,5	68	68	57	2,4	2,4	2,4	438	217	107	270
DS45110	110,0	110,6	110,6	72	72	62	3,0	3,0	3,0	636	239	118	294
DS45125	125,0	125,7	125,7	63	63	54	3,4	3,1	3,2	718	262	133	303
DS45140	140,0	140,8	140,8	80	80	61	3,1	2,8	2,9	854	289	147	344
DS45160	160,0	160,8	160,8	80	80	61	3,5	2,9	3,0	1.178	322	167	374
DS45200	200,0	200,9	200,9	95	95	74	4,1	3,7	3,6	2.100	415	208	458

Material: PVC-U

Colour: Orange RAL 2008

Features: The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard relating to low and high temperature drainages within the structure of buildings.



FIRST PLAST S.r.l.
Località Isola Grande
17041 ALTARE (SV) - ITALIA
Tel. +39 019 58511
Email: export.first@firstcor.com



FIRST
CORPORATION