


Branch 45° MF for plumbing and drainage system **BI-BI KOLL**

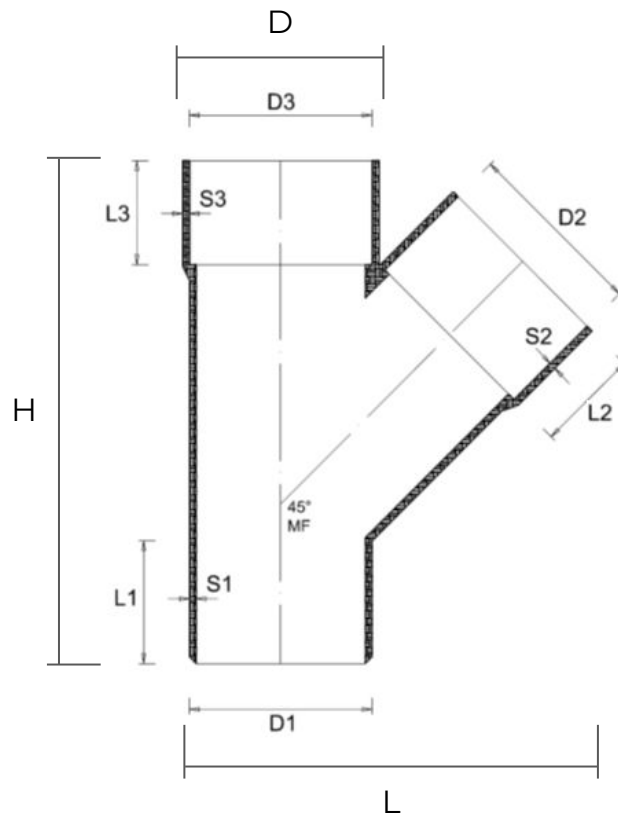

Item	D1 (M) mm	D2 (F) mm	D3 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	L mm	D mm	H mm	Weight g	NF norm
DSG45032	32,0	32,4	32,4	27	23	23	2,9	2,4	2,4	76	39	98	54	E Me
DSG45040	40,0	40,4	40,4	28	27	27	2,1	2,1	2,2	94	47	120	78	E Me
DSG45050	50,0	50,4	50,4	33	33	33	2,3	2,3	2,3	115	57	146	123	E Me
DSG45063	63,0	63,4	63,4	45	38	38	3,1	2,3	2,2	140	68	176	180	Me
DSG45075	75,0	75,5	75,5	50	45	46	2,8	3	2,8	166	83	205	280	E Me


Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Branch 45° MF for plumbing and drainage system **BI-BI KOLL**

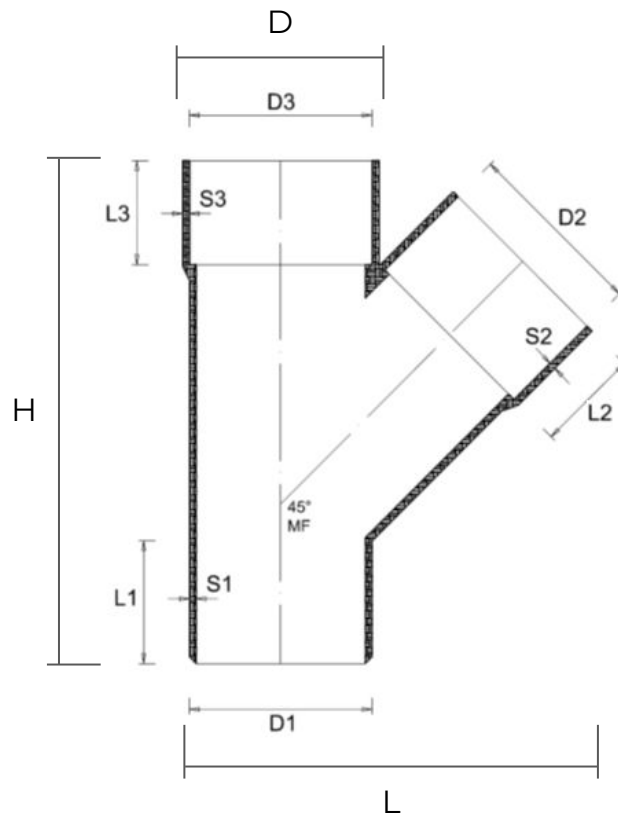

Item	D1 (M) mm	D2 (F) mm	D3 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	L mm	D mm	H mm	Weight g	NF norm
DSG45080	80,0	80,5	80,5	52	47	47	3,3	3,2	3,4	179	87	220	336	Me
DSG45090	90,0	90,5	90,5	60	51	51	3,2	3,1	3,2	197	98	242	402	Me
DSG45100	100,0	100,5	100,5	68	57	57	2,4	2,4	2,4	217	107	270	438	Me
DSG45110	110,0	110,6	110,6	72	62	62	3,0	3,0	3,0	239	118	294	636	E Me
DSG45125	125,0	125,7	125,7	63	54	54	3,4	3,1	3,2	262	133	303	718	Me


Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Branch 45° MF for plumbing and drainage system **BI-BI KOLL**

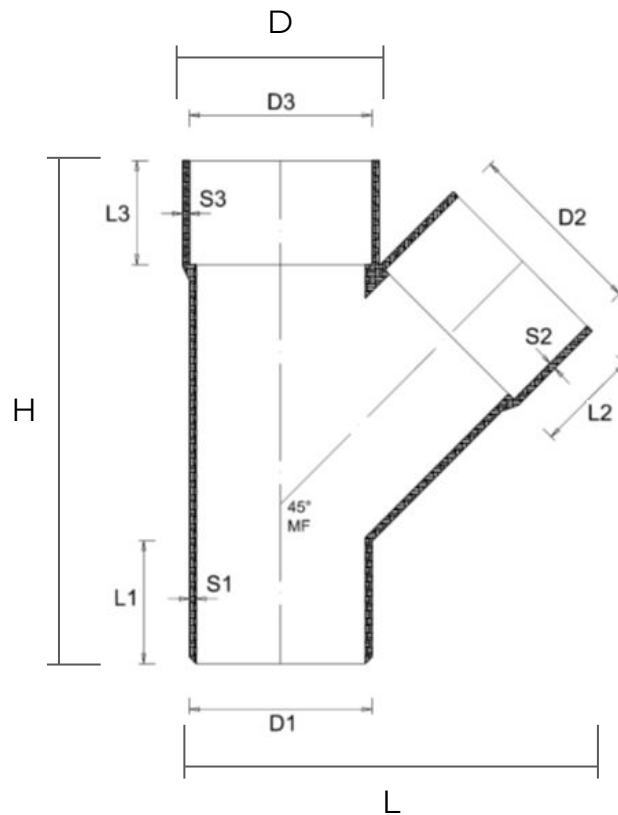

Item	D1 (M) mm	D2 (F) mm	D3 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	L mm	D mm	H mm	Weight g	NF norm
DSG45140	140,0	140,8	140,8	80	61	61	3,1	2,8	2,9	289	147	344	854	Me
DSG45160	160,0	160,8	160,8	80	60	60	3,5	2,9	3,0	322	167	374	1178	Me
DSG45200	200,0	200,9	200,9	95	74	74	4,1	3,7	3,6	415	208	458	2100	Me
DSG45250	250,0	250,9	250,9	126	124	124	5,3	4,9	4,8	530	261	611	4958	Me

Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.

