


Branch 45° FF for plumbing and drainage system **BI-BI KOLL**

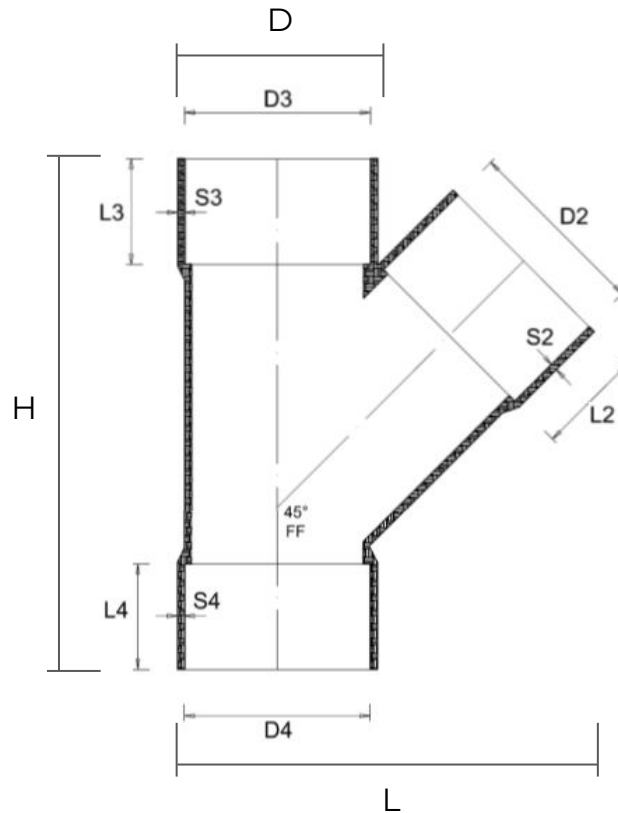

| Item | D2 mm | D3 mm | D4 mm | L2 mm | L3 mm | L4 mm | S2 mm | S3 mm | S4 mm | L mm | D mm | H mm | Weight g | NF norm |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|----------|---------|
| DSG45032F | 32,4 | 32,4 | 32,4 | 23 | 23 | 23 | 2,4 | 2,4 | 2,4 | 78 | 39 | 97 | 54 | E Me |
| DSG45040F | 40,4 | 40,4 | 40,4 | 27 | 27 | 27 | 2,1 | 2,2 | 2,2 | 95 | 47 | 120 | 80 | E Me |
| DSG45050F | 50,4 | 50,4 | 50,4 | 32 | 33 | 33 | 2,2 | 2,3 | 2,3 | 120 | 57 | 146 | 126 | E Me |
| DSG45063F | 63,4 | 63,4 | 63,4 | 38 | 38 | 38 | 2,2 | 2,2 | 2,2 | 140 | 68 | 177 | 170 | Me |
| DSG45075F | 75,5 | 75,5 | 75,5 | 45 | 46 | 45 | 2,9 | 2,9 | 2,9 | 166 | 83 | 206 | 288 | E Me |


Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Branch 45° FF for plumbing and drainage system **BI-BI KOLL**

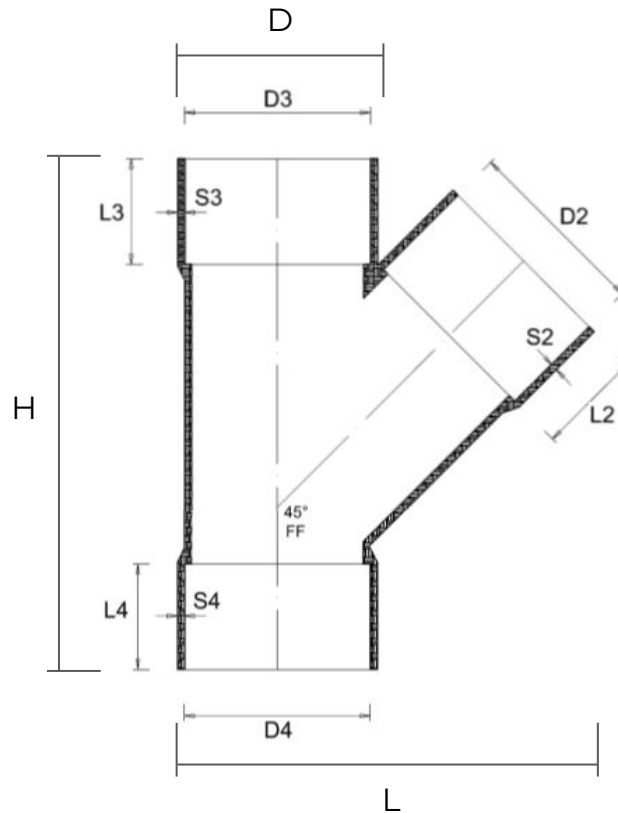

| Item | D2 mm | D3 mm | D4 mm | L2 mm | L3 mm | L4 mm | S2 mm | S3 mm | S4 mm | L mm | D mm | H mm | Weight g | NF norm |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|----------|---------|
| DSG45080F | 80,5 | 80,5 | 80,5 | 46 | 46 | 46 | 3,2 | 3,2 | 3,1 | 177 | 87 | 216 | 326 | Me |
| DSG45090F | 90,5 | 90,5 | 90,5 | 51 | 52 | 51 | 3,1 | 3,1 | 3,1 | 198 | 98 | 243 | 410 | Me |
| DSG45100F | 100,5 | 100,5 | 100,5 | 57 | 57 | 57 | 2,4 | 2,4 | 2,4 | 217 | 107 | 270 | 442 | Me |
| DSG45110F | 110,6 | 110,6 | 110,6 | 62 | 62 | 62 | 3,0 | 3,0 | 2,9 | 240 | 118 | 297 | 650 | E Me |
| DSG45125F | 125,7 | 125,7 | 125,7 | 60 | 60 | 61 | 2,7 | 2,7 | 2,6 | 262 | 131 | 306 | 656 | Me |


Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE and the NF055 (Evacuation) regulation certified by the CSTB.



Branch 45° FF for plumbing and drainage system **BI-BI KOLL**

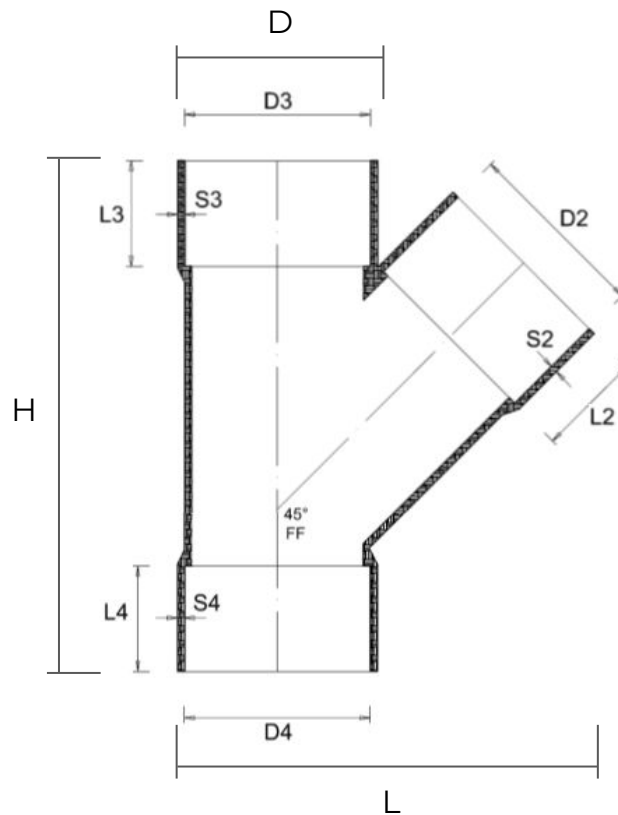

| Item | D2 mm | D3 mm | D4 mm | L2 mm | L3 mm | L4 mm | S2 mm | S3 mm | S4 mm | L mm | D mm | H mm | Weight g | NF norm |
|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|----------|---------|
| DSG45140F | 140,8 | 140,8 | 140,8 | 61 | 61 | 61 | 2,9 | 2,9 | 2,9 | 289 | 147 | 343 | 860 | Me |
| DSG45160F | 160,8 | 160,8 | 160,8 | 61 | 61 | 61 | 2,9 | 3,0 | 3,0 | 322 | 167 | 374 | 1190 | Me |
| DSG45200F | 200,9 | 200,9 | 200,9 | 74 | 74 | 74 | 3,6 | 3,6 | 3,6 | 410 | 208 | 458 | 2138 | Me |

Material: PVC-U

Colour: Dark Grey RAL 7037

Features: The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE.

