



Completion range building fittings - Bend 87° 30' with inspection cap -

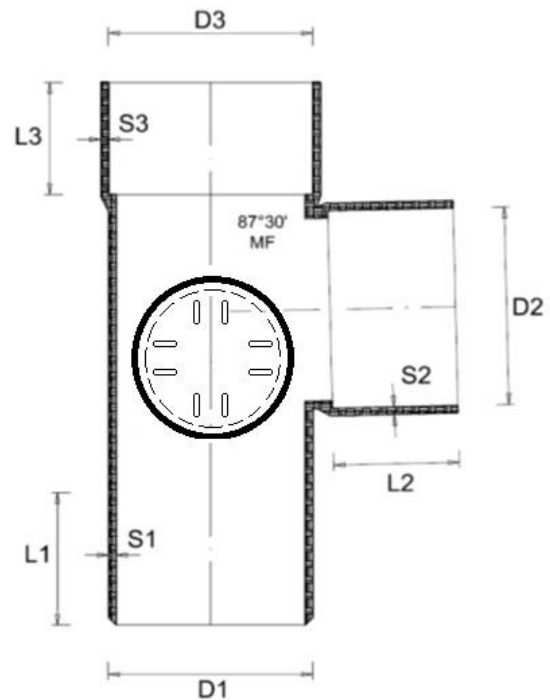

RIGHT

DSTVD87125



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	D3(F)	L1(M)	L2(F)	L3(F)	S1(M)	S2(F)	S3(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
DSTVD87100	100,0	100,5	100,5	57	57	57	3,0	3,0	3,0	191	170	247	540
DSTVD87125	125,0	125,6	125,6	62	53	53	3,2	3,0	3,0	201	198	258	640

Material: PVC-U

Colour: Orange RAL 2008

Features: The item is made from the 87°30' D.IXX mm MFF branch to which a socket with threaded screw cap D. 80 mm is welded.
The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

