



## Completion range building fittings - Branch 45° with inspection cap -

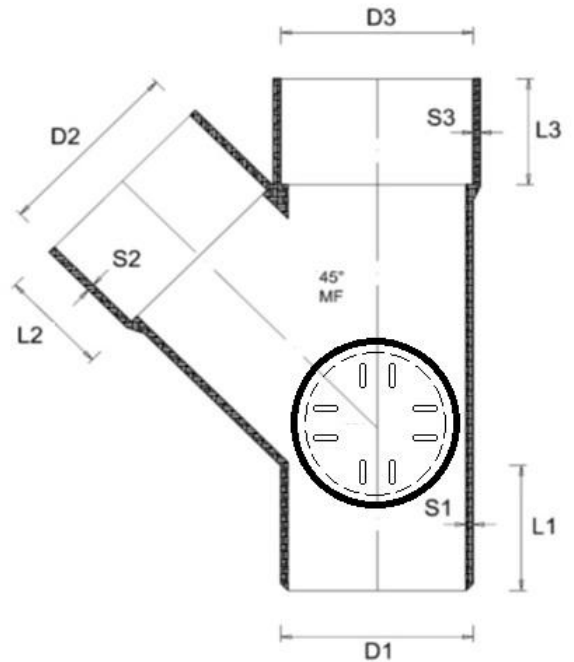

DSTVS45100



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	D3(F)	L1(M)	L2(F)	L3(F)	S1(M)	S2(F)	S3(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
<b>DSTVS45100</b>	100,0	100,5	100,5	64	57	57	2,4	2,4	2,4	226	168	270	540
<b>DSTVS45125</b>	125,0	125,6	125,6	57	54	54	3,2	3,0	3,0	270	190	303	790

**Material:** PVC-U

**Colour:** Orange RAL 2008

**Features:** The item is made from the DS451XX branch (45° branch D. 1XX mm MFF) to which a socket with threaded screw cap D. 80 mm is welded.  
The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.



FIRST PLAST S.r.l.  
Località Isola Grande  
17041 ALTARE (SV) - ITALIA  
Tel. +39 019 58511  
Email: export.first@firstcor.com



**FIRST**  
CORPORATION