


## Integrated systems - Pipe connection gasket -



Patented models

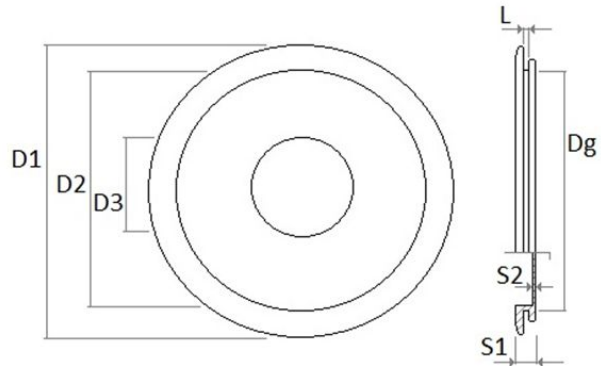

Item	D1 mm	D2 mm	D3 mm	Dg mm	L mm	S1 mm	S2 mm	Weight g
<b>GUS20</b>	128	102	34	110	1,8	10	0,8	50
<b>GUS30</b>	166	132	60	140	1,8	10	0,8	72
<b>GUS45</b>	275	232	90	242	2,2	15	0,8	230

**Material:** Rubber

**Colour:** Black

**Features:** The gasket is made of a single piece and must be inserted into the hole opened on the wall of the "2000 Series" and Simplex wells.  
The cutting lines are shown on the thin wall to adapt the gasket to the various diameters of the pipes to be inserted. The pre-existing central hole allows the insertion of the smallest diameter.  
The GUS gasket, in addition to compensating for expansion and settlement, allows the insertion of pipes with an inclination of up to 20°.

