



## Sewerage series - Coupler with shutter -

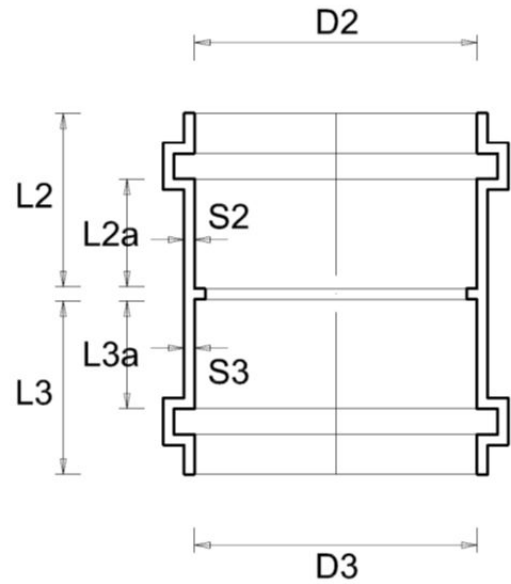

MFFOA160



REFERENCE REGULATIONS: EN 1401-1:2019

Item	D1 (M)	D3(F)	L2 (F)	L3 (F)	L2a (F)	L3a(F)	S2(F)	S3(F)	LENGTH mm	WIDTH mm	HEIGHT mm	WEIGHT g
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
<b>MFFOA160</b>	160,0	160,5	58	58	31	31	3,5	3,5	180	180	116	425
<b>MFFOA200</b>	200,6	200,6	79	74	47	43	3,7	3,7	225	225	151	730

**Material:** PVC-U

**Colour:** Red RAL 8023

**Features:** The couplers including O'RING gasket are used for:

- Discharges of civil and industrial waste water (white, black and mixed water).
- Industrial, agricultural and waste water discharges in general within the limit of the chemical resistance of the materials.

