


## Completion range building fittings - sleeve with flap -



MFS100

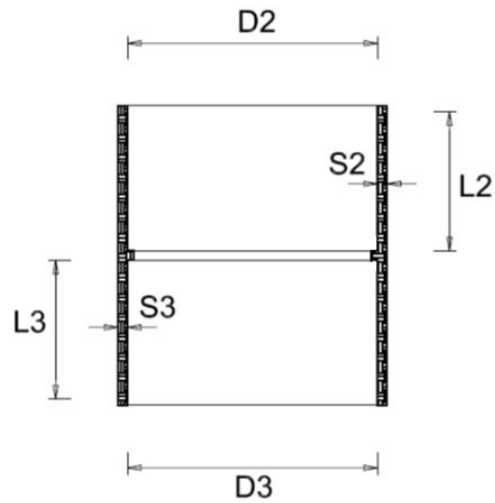

REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D3 (F) mm	D2 (F) mm	L3 (F) mm	L2 (F) mm	S3 (F) mm	S2 (F) mm	Weight g	Ø external mm	TOTAL H. mm
<b>MFS032</b>	32,4	32,4	22	22	2,0	2,0	16	39	47
<b>MFS040</b>	40,4	40,4	26	26	2,0	2,0	23	46	56
<b>MFS050</b>	50,4	50,4	32	32	2,0	2,0	33	56	66
<b>MFS063</b>	63,4	63,4	38	38	2,9	2,9	70	70	79
<b>MFS080</b>	80,5	80,5	46	46	2,8	2,8	104	87	95
<b>MFS100</b>	100,5	100,5	57	57	2,5	2,5	128	105	116
<b>MFS125</b>	125,7	125,7	61	61	3,2	3,2	231	132	124
<b>MFS140</b>	140,8	140,8	61	61	3,3	3,3	264	147	125
<b>MFS160</b>	160,8	160,8	61	61	3,4	3,4	316	168	125
<b>MFS200</b>	200,9	200,9	81	81	3,8	3,8	564	209	164

**Material:** PVC-U

**Colour:** Orange RAL 2008

**Features:** The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

