


## Non return valves with O-Ring and lock



NRO250A

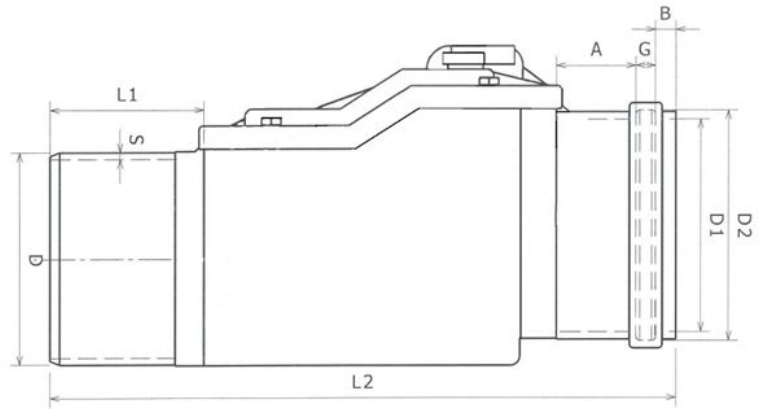

Item	A mm	B mm	D mm	D1 mm	D2 mm	G mm	L1 mm	L2 mm	S mm	LENGTH mm	WIDTH mm
<b>NRO250A</b>	55	18	250,0	251,0	273,0	23	144	566	6,2	340	375
<b>NRO315A</b>	62	20	315,0	316,0	339,0	25	160	728	7,7	425	465

**Material:** PVC-U

**Colour:** Red RAL8023

**Features:** O-ring valves are anti-flood devices that automatically close when backflow from the sewer system occurs and allow normal drainage when backflow ceases. Installation is possible in gravity-operated wastewater drainage systems, inside and outside buildings for residential, commercial and industrial use.

The valves are equipped with a manual locking device for the closing plate, a rubber seal ring inside the bowl and a removable cover for inspection and maintenance.

The valves are all CE marked as they comply with the EN13564-1 standard.

