



## Slotted grate 100 for drainage channel 100 **PRATIKO**





PCF1020G

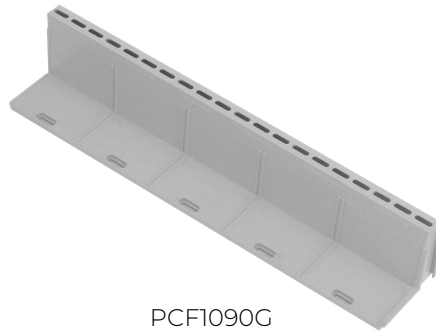

PCF1090G

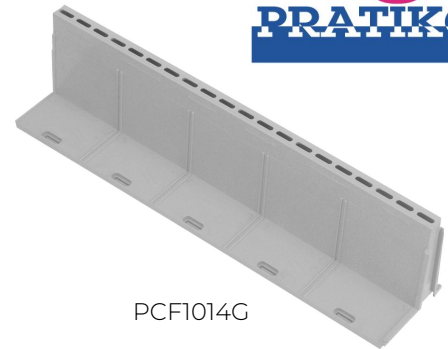

PCF1014G

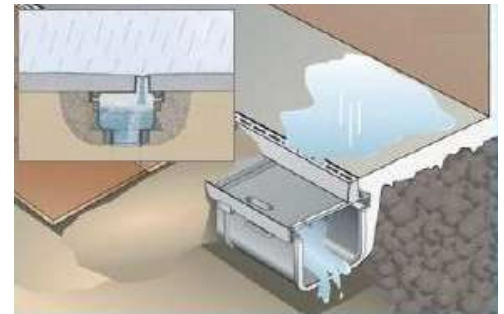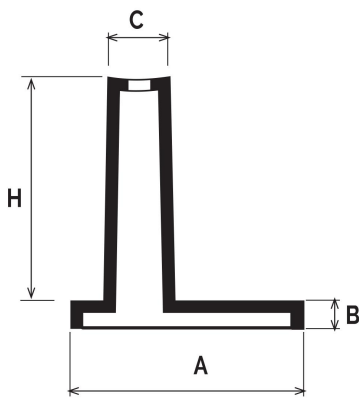

Item	A mm	B mm	C mm	H mm	L mm	Breaking load kN *	Weight g
<b>PCF1020G</b>	100	13	20	20	500	15	310
<b>PCF1090G</b>	100	13	20	90	500	70	620
<b>PCF1014G</b>	100	13	20	140	500	110	830

**Material:** PVC-U

**Colour:** Light grey

**Features:** The grate has the CE marking in compliance with the UNI EN 1433 standard.  
 - Area of water drainage (All models): 22,4 cm<sup>2</sup> (20 slits of length 20 mm).  
 - Drainage rate (All models): 1,6 lt/s per linear meter of clean drain (theoretical value calculated with shutter hypothesis 20 mm).

(\*) NOTE: the breaking load of the drains depends on the lining that is placed over them. The values indicated above were obtained with complete concrete lining.

