


Completion range building fittings - eccentric reduction -



RES10082

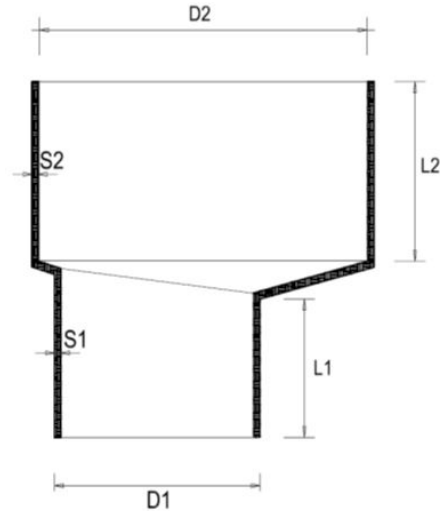

REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1 (M) mm	D2 (F) mm	L1 (M) mm	L2 (F) mm	S1 (M) mm	S2 (F) mm	Weight g	Ø externa l mm	TOTAL H. mm
RES04032	32,0	40,4	22	27	2,8	2,8	30	46	56
RES05040	40,0	50,4	29	35	3,3	3,7	59	58	77
RES08050	50,0	80,5	33	47	3,0	3,0	91	87	91
RES10082	82,0	82,5	51	61	4,5	3,7	227	108	128
RES160100	100,0	100,5	56	69	3,1	3,6	377	168	146
RES160125	125,0	160,8	58	71	3,2	3,7	380	168	142

Material: PVC-U

Colour: Orange RAL 2008

Features: The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

