


Grate for drainage channel 130 **PRATIKO**



SGRB130G

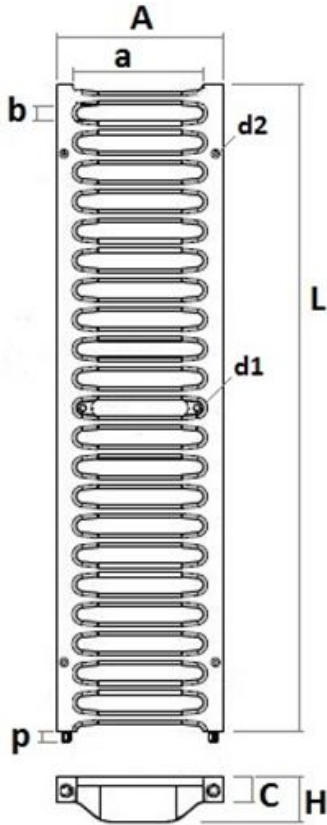

SGRB130S



SGRB130N

Item	A mm	L mm	C mm	H mm	a mm	b mm	p mm	d1 mm	d2 mm	Weight g	Load class	Breaking load kN
SGRB130G	129	500	20	35	98	8	7,5	5,5	3,6	800	B125	> 75
SGRB130S	129	500	20	35	98	8	7,5	5,5	3,6	800	B125	> 75
SGRB130N	129	500	20	35	98	8	7,5	5,5	3,6	700	B125	65

Material: PVC-U SGRB130G, SGRB130S
B-TEK "biotechnological material" SGRB130N

Colour: SGRB130G Grey - SGRB130S Sand - SGRB130N Black

Features: The drive-over grate complies with UNI EN 1433 standard.

- Theoretical flow rate 2,1 l/s
- Section 250 cm² of water drainage (22 slots of 11,4 cm²)



FIRST PLAST S.r.l.
Località Isola Grande
17041 ALTARE (SV) - ITALIA
Tel. +39 019 58511
Email: export.first@firstcor.com



FIRST
CORPORATION