

DATA SHEET


Completion range building fittings - double reduction buffer -



TAS14032



TAS14332

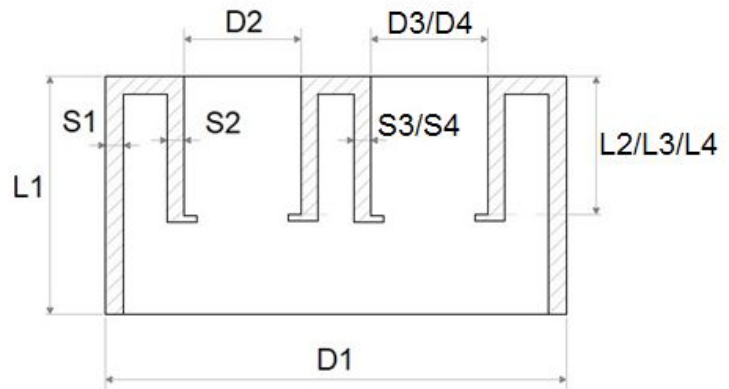

REFERENCE REGULATIONS: UNI EN 1329-1:2021

ITEM	D1 (M) mm	D2 (F) mm	D3 (F) mm	D4 (F) mm	L1 (M) mm	L2 (F) mm	L3 (F) mm	L4 (F) mm	S1 (M) mm	S2 (F) mm	S3 (F) mm	S4 (F) mm	Weight g
TAS13232	100,0	32,4	32,4	-	55	23	23	-	2,7	3,0	3,0	-	106
TAS14032	100,0	32,4	40,4	-	54	23	27	-	2,8	2,8	2,8	-	100
TAS14040	100,0	40,4	40,4	-	56	26	26	-	2,8	2,8	2,8	-	102
TAS15032	100,0	32,4	50,4	-	55	22	31	-	2,4	2,6	2,6	-	94
TAS14332	100,0	32,4	32,4	40,4	54	23	23	27	2,9	2,9	2,9	2,9	110

Material: PVC-U

Colour: Orange RAL 2008

Features: The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications. The buffers have a small external border (approximately 2 mm) on the top which acts as a stop during insertion



FIRST PLAST S.r.l.
Località Isola Grande
17041 ALTARE (SV) - ITALIA
Tel. +39 019 58511
Email: export.first@firstcor.com



FIRST
CORPORATION