



Completion range building fittings - Reduced branch 87° 30' -

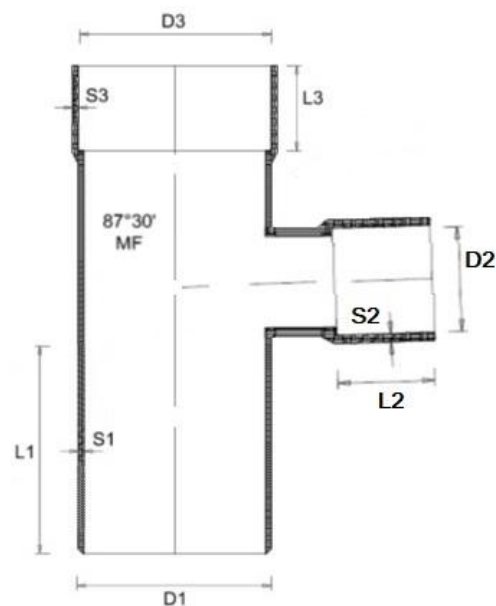

TRTS10063



REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	D1(M)	D2(F)	D3(F)	L1(M)	L2(F)	L3(F)	S1(M)	S2(F)	S3(F)	LENGTH	WIDTH	HEIGHT	WEIGHT
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	g
TRTS10040	100,0	40,4	100,5	55	26	57	3,0	2,3	2,5	142	106	177	240
TRTS10050	100,0	50,4	100,5	55	32	57	3,0	2,4	2,5	148	106	177	250
DRTS10063	100,0	63,5	100,5	65	37	54	3,0	3,0	3,0	160	107	225	345
DRTS10080	100,0	80,5	100,5	57	49	54	3,0	3,0	3,0	181	107	225	365
DRTS12540	125,0	40,4	125,6	96	26	69	3,2	3,0	3,0	173	130	265	470
DRTS12550	125,0	50,4	125,6	90	26	69	3,2	3,0	3,0	177	130	265	475
DRTS12563	125,0	63,5	125,6	80	37	69	3,2	3,0	3,0	185	130	265	475
DRTS125100	125,0	100,5	125,6	58	46	69	3,2	3,0	3,0	205	130	265	485

Material: PVC-U

Colour: Orange RAL 2008

Features: The range of solvent cement fittings produced by First Plast, is made of U-PVC in compliance with UNI EN1329-1:2021 standards, relating to high and low temperature drainage for building indoor applications.

