
## DATA SHEET

## Completion range building fittings - screw cap for inspection -



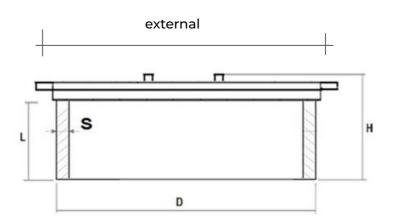

REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	L mm	D mm	H mm	S mm	Weight g	Ø external mm
TVOA110	59	110	54	2,5	134	125
TVOA125	59	125	85	3,0	252	140
TVOA160	57	160	86	2,5	328	176
TVOA200	75	200	105	2,7	486	217
TVOA250	76	250	85	4,5	1.072	268

Material: PVC-U

Colour: Red RAL 8023

Features: The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard

relating to low and high temperature drainages within the structure of buildings.

The item is composed of 3 parts:

1 - Threaded cylindrical sleeve or with bayonet inserts at the upper end

2 - Cap with thread or bayonet closure with protrusion to facilitate gripping and closing

3 - Rubber O-ring fitted onto the cap in the appropriate position

The cap is screwed onto the cylindrical tube





