


## Completion range building fittings - screw cap for inspection -



TVS100

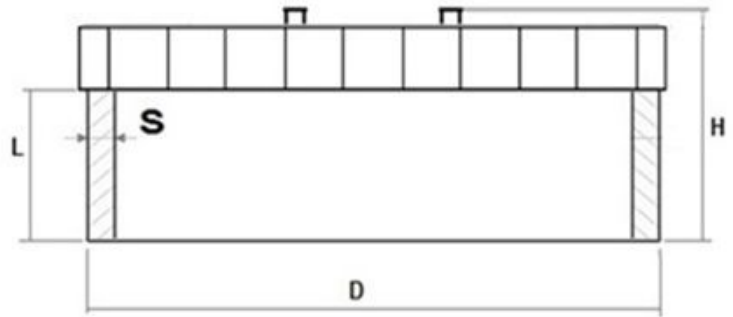

REFERENCE REGULATIONS: UNI EN 1329-1:2021

Item	L mm	D mm	H mm	S mm	Weight g	∅ external (cap) mm
<b>TVS63</b>	23	63,0	45	2,5	63	75
<b>TVS80</b>	47	80,0	66	2,2	106	101
<b>TVS100</b>	25	100,0	39	2,0	94	110
<b>TVS110</b>	59	110,0	54	2,5	134	125
<b>TVS125</b>	59	125,0	85	3,0	252	140
<b>TVS140</b>	57	140,0	84	2,5	284	157
<b>TVS160</b>	57	160,0	86	2,5	328	176
<b>TVS200</b>	75	200,0	105	2,7	486	217
<b>TVS250</b>	76	250,0	85	4,5	1.072	268

**Material:** PVC-U

**Colour:** Orange RAL 2008

**Features:** The products of the construction fittings line to be bonded produced by First Plast are made of PVC-U in compliance with the requirements prescribed by the UNI EN1329-1:2021 standard relating to low and high temperature drainages within the structure of buildings.

The article consists of 3 parts:

- 1) Cylindrical tube threaded at the upper end.
- 2) Cap with thread closure with protrusions to facilitate gripping and closing.
- 3) Rubber O-ring fitted on the cap in the appropriate position. The cap is screwed onto the cylindrical tube.

