


## Access plug with screw closure for plumbing and drainage system **BI-BI KOLL**

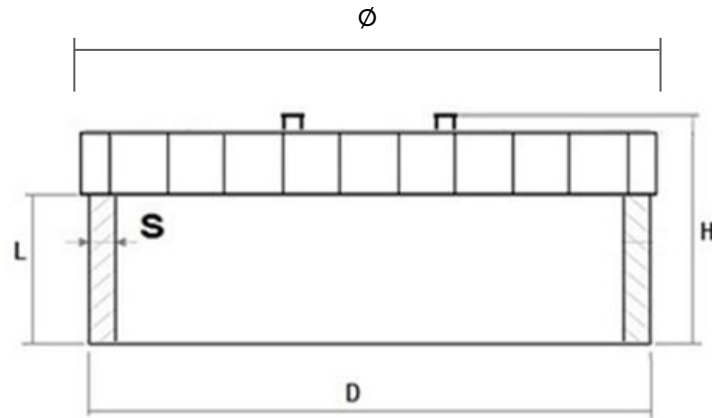

| Item           | L<br>mm | D<br>mm | H<br>mm | S<br>mm | ø<br>mm | Weight<br>g | NF norm |
|----------------|---------|---------|---------|---------|---------|-------------|---------|
| <b>TVSG63</b>  | 23      | 63,0    | 45      | 2,5     | 75      | 63          | Me      |
| <b>TVSG75</b>  | 43      | 75,0    | 63      | 2       | 101     | 104         | Me      |
| <b>TVSG80</b>  | 47      | 80,0    | 66      | 2,2     | 101     | 106         | Me      |
| <b>TVSG110</b> | 59      | 110,0   | 54      | 2,5     | 125     | 134         | Me      |
| <b>TVSG125</b> | 59      | 125,0   | 85      | 3,0     | 140     | 252         |         |

**Material:** PVC-U


**Colour:** Dark Grey RAL 7037

**Features:** The article consists of 3 parts:  
 1) Cylindrical tube threaded at the upper end.  
 2) Cap with thread closure with protrusions to facilitate gripping and closure.  
 3) Rubber O-ring fitted on the cap in the appropriate seat.  
 The cap is screwed onto the cylindrical tube.

The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE.



## Access plug with screw closure for plumbing and drainage system **BI-BI KOLL**

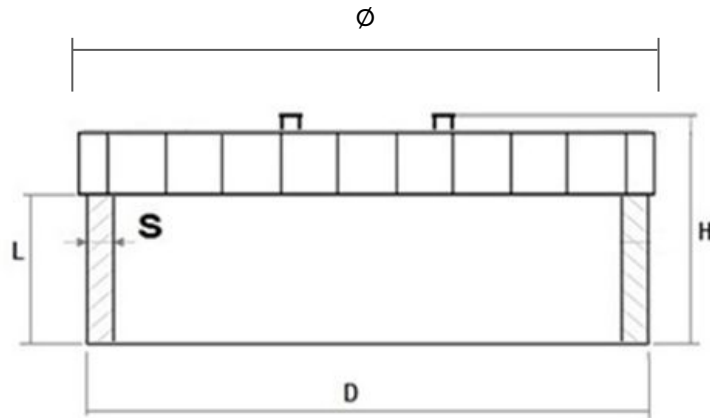

| Item           | L<br>mm | D<br>mm | H<br>mm | S<br>mm | ø<br>mm | Weight<br>g | NF norm |
|----------------|---------|---------|---------|---------|---------|-------------|---------|
| <b>TVSG140</b> | 57      | 140,0   | 84      | 2,5     | 157     | 284         | Me      |
| <b>TVSG160</b> | 57      | 160,0   | 86      | 2,5     | 176     | 328         | Me      |
| <b>TVSG200</b> | 75      | 200,0   | 105     | 2,7     | 217     | 486         | Me      |
| <b>TVSG250</b> | 76      | 250,0   | 85      | 4,5     | 268     | 1072        |         |

**Material:** PVC-U

**Colour:** Dark Grey RAL 7037

**Features:** The article consists of 3 parts:  
 1) Cylindrical tube threaded at the upper end.  
 2) Cap with thread closure with protrusions to facilitate gripping and closure.  
 3) Rubber O-ring fitted on the cap in the appropriate seat.  
 The cap is screwed onto the cylindrical tube.

The products of the plumbing and drainage fittings line are made in compliance with the requirements prescribed by the UNI EN 1329-1:2021 standard relating to low and high temperature drainage systems within the structure of buildings. The material complies with the AFNOR NF513 (Sécurité Feu) regulation certified by LNE.

